
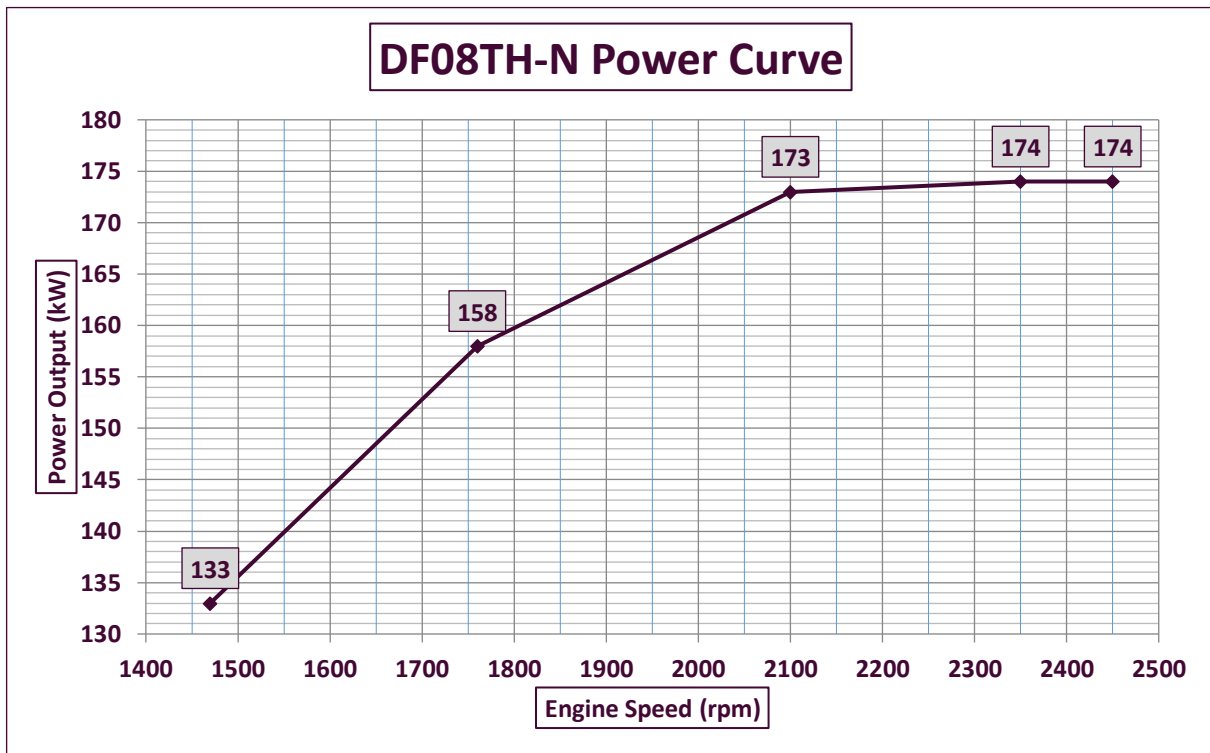
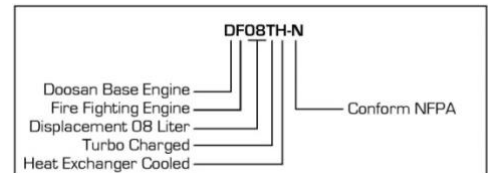


MODEL	Approved Ratings kW (hp) @ Rated speed rpm				
	1,470	1,760	2,100	2,350	2,450
DF08TH-N	133 (178)	158 (212)	173 (232)	174 (233)	174 (233)

ENGINE SPECIFICATIONS	
• Engine Series	DOOSAN PU086T
• Engine Type	In-line 4 cycle, water cooled 6 cylinder
• Aspiration	Turbo charged
• Combustion Type	Direct injection
• Bore x Stroke	<i>mm (inch)</i> 111(4.37) x 139 (5.47)
• Compression ratio	16.7 : 1
• Displacement	<i>litre (inch<sup>3</sup>)</i> 8.071(492.49)
• Rotation	Anti-Clockwise
• Dry Weight	<i>kg</i> 723
• Valves lashes at cold	<i>mm (inch)</i> Intake 0.30 (0.0118) Exhaust 0.30 (0.0118)
• Wiring Diagram	No. 01.900.07EWEN.03 (Optional)
• Panel Diagram	No. 01.900.07PWEN.03 (Optional)
• Oil pan capacity	<i>litre (gal.)</i> High level 15 (4.09) Low level 12 (3.17)
• Battery Capacity	<i>Ah</i> 150 recommend ( <i>battery not incl.</i> )
• Coolant capacity	<i>litre (gal.)</i> 21 (5.5)

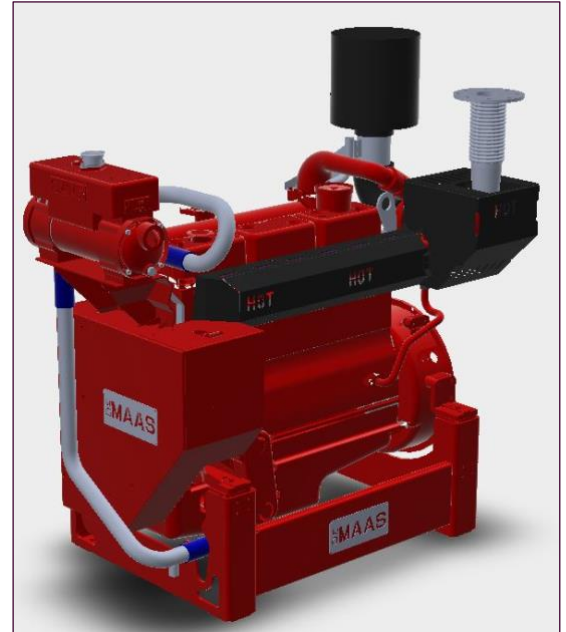

#### ENGINE RATINGS BASELINES

Engines are not to be used for continuous duty. Engines are to be used only for stationary emergency standby fire pump service. According to NFPA 25 engines are to be tested 30 minutes per week at no pump flow and full pump flow once per year.

Engines are rated at standard SAE conditions of 29.61 in. (7,521 mm) Hg barometer and 77°F (25°C) inlet temperature (approximates 300ft. (91.4m) above sea level) by the testing laboratory (see SAE Standard J1349).

A deduction of 3 percent from engine horsepower rating at standard SAE conditions shall be made for diesel engines for each 1,000ft. (305m) altitude above 300ft. (91.4m).

A deduction of 1 percent from engine horsepower rating as corrected to standard SAE conditions shall be made for diesel engines for every 10°F (5.6°C) above 77°F (25°C) ambient temperature.

**Restricted:** Use ratings only for stand-by fire pump applications

Copyright and ownership of this Power Curve is vested in De Maas B.V., whose prior written consent is required for its use, reproduction or for publication to any third party. All rights reserved.

Tested at standard SAE conditions of 29.61 in. (7,521 mm) Hg barometer and 77°F (25°C) inlet temperature (approximates 300ft. (91.4m) above sea level) by the testing laboratory (see SAE Standard J1349). Used Diesel fuel ASTM 2D.

Engine Equipment	Standard	Optional
Air cleaner	Drip proof, disposable	
Alternator	24 Volts x 45 Amps with belt guard	
Exhaust protection	Sheet steel Guarding	<b>PIPE MATRASSES ONLY</b>
Exhaust connection <i>mm (inch)</i>	87.9 (3")	
Flywheel housing	SAE 2	<b>DRIVE LINE</b>
Flywheel connection	SAE 11.5	<b>STUB SHAFT</b>
Fuel filter	Full flow, cartridge type	
Fuel lines	Flexible hoses according ISO 15540	
Mountings	Industrial type	<b>PEDESTAL MOUNTING</b>
Engine heater	24 Volts 1,500 Watt	
Governor speed	Constant speed, mechanical	
Heat exchanger	Tube stack type	
Lube Oil filter	Full flow, cartridge type	-
Lube Oil pump	Gear type, driven by crankshaft	Gear type, driven by crankshaft
Control / Instrument panel	-	Build on Engine
Junction box	-	Integrated in control panel
Manual start	-	On instrument panel
Overspeed control	-	Electronic instrument panel, test on instrument panel
Run-stop control	-	On instrument panel
Starters	24 Volts - 6 kW	
Throttle Control	Adjustable speed control,	
Water pump	Centrifugal type driven by belt	

